


# blukii Smart Beacon Go Mini

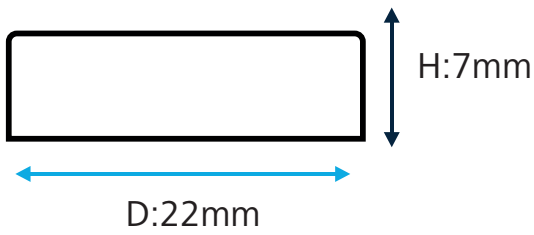

## Housing:

Measurements:	22 x 7 mm
Environment:	Indoor
Standard of protection:	IP 62
Color:	White
Front-Print :	blukii Logo blukii ID (Laser)
Sticker:	Settings

## Circuit Board :

Design:	Small
---------	-------

## Add ons:

Red LED

## Power supply:

Battery:	CR2032
Capacity:	220 mAh / 0,66Wh
Battery type:	Lithium-Mangan coin cell
Operating temp:	-20°C / +70°C

## Advertising-Protocol:

Beacon:	iBeacon Eddystone UID Eddystone TLM Eddystone URL
---------	--

## Micro-Controller:

Name:	TI CC 2640
Core:	MO & Cortex M3
Clock:	48 Mhz
Ram:	20 Kb
Flash-Memory:	128 Kb

## Transmission-Power:

Bluetooth:	Min -20 dbm to Max +5 dbm
------------	---------------------------

## Range:

Bluetooth:	approx. 50m
------------	-------------



Advertising in seconds	0,1	0,5	1
Theoretical lifetime in years at room temperature	0,05	0,23	0,47