


blukii Sensor Beacon Go Mini

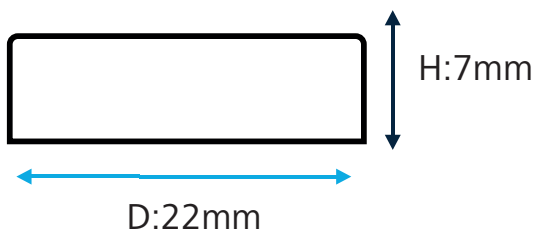

Housing:

Measurements: 22 x 7 mm
 Environment: Indoor
 Standard of protection: IP 62
 Color: White
 Front-Print : blukii Logo
 blukii ID (Laser)
 Sticker: Settings

Sensors:

Acceleration (Tilt)
 Temperature
 Magnetic feeld
 Proximity sensor/ Reed-Contact

Advertising-Protocol:

Beacon: iBeacon
 blukii SensorBeacon

Circuit Board :

Design: Small

Add ons:

Red LED

Power supply:

Battery: CR2032
 Capacity: 220 mAh / 0,66Wh
 Battery type: Lithium-Mangan coin cell
 Operating temp: -20°C / +70°C

Micro-Controller:

Name: TI CC 2640
 Core: MO & Cortex M3
 Clock: 48 Mhz
 Ram: 20 Kb
 Flash-Memory: 128 Kb

Transmission-Power:

Bluetooth: Min -20 dbm to Max +5 dbm

Range:

Bluetooth: approx. 50m

Advertising in seconds	0,1	0,5	1
Theoretical lifetime in years at room temperature	0,04	0,18	0,3

